



Tyre mounting

01

Zinc adhesive weights 45 g

Plastic coating

▶ Item no. 9834-14-745

▶ Product description

- Width: 19.0 mm
- Height: 3.8 mm
- Segments: 5 g + 10 g
- Impact-resistant plastic coating



01

02

Zinc adhesive weights 60 g ECO

powder coated

▶ Item no. 9837-67-60

▶ Product description

- Width: 19.0 mm
- Height: 4.0 mm
- Segments: 5 g
- Surface: powder-coated



02

03

Adhesive zinc weights - 5 kg roll

powder coated

▶ Item no. 9836-15-700

▶ Product description

- Endless adhesive weight with 1,000 segments x 5 grams (5kg)
- With impact-resistant plastic coating in grey
- Width: 19 mm
- Height: 3.8 mm incl. adhesive tape
- Weight material: Zinc
- Adhesive tape: High-quality double-sided adhesive tape with blue liner
- Coating: High-quality powder coating / uncoated, galvanized
- Corrosion resistance: ≥ 250h in salt spray test to DIN EN ISO 9227



03

04

Cutter for adhesive wheel balancing weight rolls

with wall attachment

▶ Item no. 9836-5

▶ Product description

- Cutter for adhesive strips on a roll
- Scaling for 5.0 g and 2.5 g weights
- User-friendly cutter
- Replaceable blade
- Simple wall mounting (front or side)



04



01

Steel adhesive weights black 60 g

Impact-resistant plastic coating

▶ Item no. 9834-97-60

▶ Product description

- Width: 19.0 mm
- Height: 4.0 mm
- Segments: 5 g
- Impact-resistant black plastic coating
- OEM quality



01

02

Steel adhesive weights 60 g ECO

impact-resistant plastic coating

▶ Item no. 9834-397-60

▶ Product description

- Weight: 12 x 5g
- Width: 19 mm
- Height: 3.7 mm incl. adhesive tape
- Weight identification: Fe (iron)
- Area of application: Almost all light-metal rims



02

03

Adhesive steel weights - 5 kg roll

powder coated

▶ Item no. 9836-15-500

▶ Product description

- Endless adhesive weight with 1,000 segments x 5 grams (5kg)
- With impact-resistant plastic coating in grey
- Weight material: steel
- Height: 3.5 mm incl. adhesive tape
- Width: 19 mm
- Adhesive tape: High-quality double-sided adhesive tape with blue liner
- Coating: High-quality powder coating / uncoated, galvanized
- Corrosion resistance: ≥ 250h in salt spray test to DIN EN ISO 9227



03

04

Adhesive weight

Plastic coating

▶ Product description

- Above 25 g with one notch
- Above 45 g with two notches
- To facilitate moulding to the rim radius
- OEM quality



04

Item no.	Weight	Width x height	Item no.	Weight	Width x height
9834-912-5	5 g	15 mm x 3,8 mm	9834-912-35	35 g	19 mm x 3,8 mm
9834-912-10	10 g	15 mm x 3,8 mm	9834-912-40	40 g	19 mm x 3,8 mm
9834-912-15	15 g	19 mm x 3,8 mm	9834-912-45	45 g	19 mm x 3,8 mm
9834-912-20	20 g	19 mm x 3,8 mm	9834-912-50	50 g	19 mm x 3,8 mm
9834-912-25	25 g	19 mm x 3,8 mm	9834-912-55	55 g	19 mm x 3,8 mm
9834-912-30	30 g	19 mm x 3,8 mm	9834-912-60	60 g	19 mm x 3,8 mm

05

Adhesive lead strip 40 g

For motorcycles

▶ Item no. 9836-17-60

▶ Product description

- Pitch: 8 x 5g
- width: 10 mm
- Height: 4.7 mm incl. adhesive tape
- for almost all light alloy rims



05



01

Universal balance weights

for steel rims, powder-coated

- Technical specifications
- OEM quality



01

Item no.	Weight	Item no.	Weight
9836-1-5	5 g	9836-1-35	35 g
9836-1-10	10 g	9836-1-40	40 g
9836-1-15	15 g	9836-1-45	45 g
9836-1-20	20 g	9836-1-50	50 g
9836-1-25	25 g	9836-1-55	55 g
9836-1-30	30 g	9836-1-60	60 g

02

Universal balance weights

For light-metal rims, powder coated

- Product description
- OEM quality



02

Item no.	Weight	Item no.	Weight
9836-3-5	5 g	9836-3-30	30 g
9836-3-10	10 g	9836-3-35	35 g
9836-3-15	15 g	9836-3-40	40 g
9836-3-20	20 g	9836-3-45	45 g
9836-3-25	25 g	9836-3-50	50 g

03

Universal balance weight ECOfor alloy rims,
powder-coated

03

Item no.	Weight	Item no.	Weight
9837-3-5	5 g	9837-3-30	30 g
9837-3-10	10 g	9837-3-35	35 g
9837-3-15	15 g	9837-3-40	40 g
9837-3-20	20 g	9837-3-45	45 g
9837-3-25	25 g	9837-3-50	50 g



04

Plug-type wheel balance weight type 75

For Mercedes steel and aluminium wheel rims



04

Item no.	Weight	Item no.	Weight
9834-75-5	5 g	9834-75-40	40 g
9834-75-10	10 g	9834-75-45	45 g
9834-75-15	15 g	9834-75-50	50 g
9834-75-20	20 g	9834-75-55	55 g
9834-75-25	25 g	9834-75-60	60 g
9834-75-30	30 g	9834-75-001	For aluminium wheel rims
9834-75-35	35 g	9834-75-002	for steel rim

05

Universal balance weight ECO

For steel rims, coated



05

Item no.	Weight	Item no.	Weight
9837-5-5	5 g	9837-5-30	30 g
9837-5-10	10 g	9837-5-35	35 g
9837-5-15	15 g	9837-5-40	40 g
9837-5-20	20 g	9837-5-45	45 g
9837-5-25	25 g	9837-5-50	50 g

01

Zinc striking weights for FORD steel rims type 187

Zinc striking weights for FORD steel rims type 187

► Technical specifications

- Genuine part for FORD Transit and FORD Transit Custom 05/2014



01

Item no.	Weight	Item no.	Weight
9836-187-10	10 g	9836-187-40	40 g
9836-187-15	15 g	9836-187-45	45 g
9836-187-20	20 g	9836-187-50	50 g
9836-187-25	25 g	9836-187-55	55 g
9836-187-30	30 g	9836-187-60	60 g
9836-187-35	35 g		

03

Striking weight for 15° tapered rims

Lead, from 22,5 x 6,75 to 26,50 x 12,00



03

Item no.	Weight	Item no.	Weight
9836-32-75	75 g	9836-32-250	250 g
9836-32-50	50 g	9836-32-300	300 g
9836-32-100	100 g	9836-32-350	350 g
9836-32-150	150 g	9836-32-400	400 g
9836-32-200	200 g		

02

Zinc striking weights for steel rims type 164

For steel rims type 164

► Technical specifications

- Genuine part for MERCEDES-BENZ Sprinter
 - For steel rims on French vehicles
 - For steel rims on light commercial vehicles (with greater material thickness)
 - FORD Transit up to 2013
 - VW Crafter



02

Item no.	Weight	Item no.	Weight
9836-164-5	5 g	9836-164-35	35 g
9836-164-10	10 g	9836-164-40	40 g
9836-164-15	15 g	9836-164-45	45 g
9836-164-20	20 g	9836-164-50	50 g
9836-164-25	25 g	9836-164-55	55 g
9836-164-30	30 g	9836-164-60	60 g

01

Rubber valve

Item no.	Total length (without cap)	Model
9879-412	33 mm	OEM quality
9879-413	43 mm	OEM quality
9879-414	48 mm	OEM quality
9879-418	61 mm	OEM quality
9879-413-4	43 mm	ECO
9879-414-4	48 mm	ECO
9879-418-4	61 mm	ECO



01

02

Metal valve

For vans, PCVs and vehicles with high tyre pressure

► Product description

- Pressure-resistant up to 14 bar
- Wrench size 11
- High-temperature seal for peak temperatures of over +150°C



02

Item no.	Total length (without cap)	Width across flats
9879-413-40	40 mm	11 mm
9879-414-47	47 mm	11 mm

03

Metal valve

Item no.	Model	Width across flats
9879-563	43 mm	14 mm
9879-563-1	with high nut	11 mm



03

04

Aluminium valve black

► Item no. 9879-563-2

► Product description

- Valve hole diameter: 11,3 + 0,4mm
- rim thickness: 1,8 - 4mm
- Valve length: 42mm
- Width across flats: 11mm
- Tightening torque: 4 + -0.5Nm
- Pressure range: up to max. 14bar
- Valve complete
- easy assembly and disassembly union nut fits over the valve cap



04

05


Special Ford valve

Rubber valve

► Item no. 9879-414-2

► Product description

- Valve length: 56.6 mm
- Rim thickness: 1.8 mm - 4 mm
- ETRTO No.: V2.03.8
- TR No.: 414L
- Valve hole diameter (mm): 11.3 + 0.4
- Pressure range: < 4.5 bar
- Up to a speed of 210 km/h

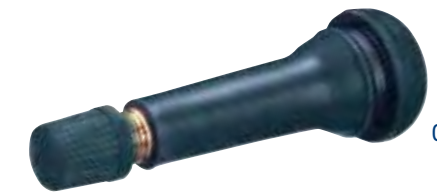

05

06

Commercial vehicle valve

Alligator, CVV

► Item no. 9879-530-40

► 40 mm

► Item no. 9879-530-47

► 47 mm

► Item no. 9879-530-60

► 60 mm



06

07

Valve

For tubeless commercial vehicle tyres, straight version

► Item no. 9879-800-41

► 9.7 x 41 mm



07

01

Valve extension from plastic, black

- ▶ Item no. 9879-71
- ▶ 19 mm
- ▶ Item no. 9879-73
- ▶ 38 mm



01

02

Valve insert

short model

- ▶ Item no. 9879-44

- ▶ Product description
- Material: Nickel-plated brass
- Opening pressure: 3 bar +/- 25%
- Working pressure: < 20 bar
- Starting torque: 25 - 30 Ncm



02

03

Valve cap

Metal

- ▶ Item no. 9879-46
- ▶ Product description
- Prevents corrosion at the valve thread



03

04

Valve cap

Metal

- ▶ Item no. 9879-47
- ▶ Product description
- Prevents corrosion at the valve thread
- Made from nickel-plated brass with a seal
- With extractor for valve insert



04

08

Valve cap

Plastic

- ▶ Item no. 9879-45
- ▶ black
- ▶ Item no. 9879-48
- ▶ red
- ▶ Item no. 9879-49
- ▶ green with valve gasket



05

06

Wheel nuts Ford

OE no. 1007487, 6040307, 1447852

M12 x 1.5 galvanised
Quality 8 Wrench size 19

- ▶ Item no. 6395-12-15

OE no. 1470843
M12 x 1.5 galvanised
Quality 10, Wrench size 19

- ▶ Item no. 6395-12-151



06

07

Wheel nuts MazdaMazda, Mitsubishi, Toyota
OE no. Mazda 0603-26-161
OE no. Mitsubishi MA103087
OE no. Toyota 90942-01001-83
M12 x 1.5 yellow passivated
Quality 8 Wrench size 21

- ▶ Item no. 6395-012-15



07

08

Wheel bolts Audi / VWVolkswagen / Audi OE-no. 8D0
601 139 D M14 x 1.5 x 25.5
Geomet black FK 8.8 Wrench size 17

- ▶ Item no. 6395-214-15



08

09

Screwing tool

for all common valves

- ▶ Item no. 9879-54-00
- ▶ Product description
- Tightening torque: approx. 25-30 Nm



09

10

Adhesive weights remover

Plastic

- ▶ Item no. 8715-64-80



10

11

Tyre valve insert tool

Coated in plastic

- ▶ Item no. 9879-54-041
- ▶ Product description
- Length: 290 mm



11

12

Extension cap with seal

Check valve

- ▶ Item no. 9879-66



12

13

Valve extension

Air-Flexx, steel, flexible

- ▶ Item no. 9879-700-145
- ▶ 145 mm
- ▶ Item no. 9879-700-185
- ▶ 185 mm
- ▶ Item no. 9879-700-215
- ▶ 215 mm



13

14

Valve extension

Plastic, rigid

- ▶ Item no. 9879-74
- ▶ 115 mm
- ▶ Item no. 9879-75
- ▶ 150 mm
- ▶ Item no. 9879-76
- ▶ 170 mm



14

01

Valve lever connector

for tyre hand-held gauges

▶ Item no. 9879-54-06

▶ Product description

- For hose inner diameters of 6 mm
- Total length approx. 40 mm
- Diameter of valve on inlet side approx. 18 mm
- Pin diameter: 7mm



01

02

Quick plug connection

With hose 18 x 1.5 mm

▶ Item no. 9879-54-08



02

03

Service station air chucks

for tyre hand-held gauges

▶ Item no. 9879-54-07

▶ Product description

- For hose inner diameter of 7 mm
- Diameter of connector 8 mm
- Length about 355



03



04

Tyre hand-held gauges

Suitable for PCVs and HGVs, calibrated

▶ Item no. 9879-54-05

▶ Product description

- Calibrated (for two years from stamp date)
- Filling pressure: max. 12 bar
- For cars/HGVs
- Rubber protective cap protects mechanism from external impacts
- Overpressure safety protection
- Easy to read
- Weight-optimized design
- Integrated anti-kinking stabilizes the filling hose at the start
- 500 mm-long filling hose for valves hard to access
- With suspension loop
- Ergonomic structure
- Single-lever operation
- PTB approval
- Checks on compressed air possible even without pressurization



04

05

Tyre hand-held gauges

With digital display, calibrated

▶ Item no. 9879-54-04

▶ Product description

- Calibrated
- PTB approval
- Modern, light, impact-resistant construction
- Clear, easy-read display
- Single-stage valve design increases filling and deflating speed
- Overpressure warning if pressure exceeds 12 bar/174 PSI/1,200 kPa
- Warning light for weak battery
- Connecting thread: 1/4" internal thread
- Hose length: 180 cm
- Max. inlet pressure: 15 bar
- Max. inflation time: 910 i/min
- Inflation range: 0 - 12 bar
- Battery type art. no.: 3722-32 CR 2450
- Life of battery: up to 950h
- System-connected software increases accuracy, precision measurement and eliminates the possibility of incorrect readings



05

01

Blue tyre fitting paste for run-flat and wide-profile tyres

Run-Tap

- ▶ Item no. 2894-459
- ▶ Contents: 5 kg
- ▶ Packing unit: 1

▶ **Product description**

- Especially for run-flat, wide and low profile tyres
- Increased sliding effect, optimum seal effect
- Dries quickly and transparently
- Can also be used in warm/hot regions
- No drying out in open tubs
- Consistency: creamy
- Colour: blue
- Processing temperature: -10° C to +50° C



01

02

Tyre installation paste

TAP

- ▶ Item no. 2894-455
- ▶ Contents: 5 kg
- ▶ Packing unit: 1

Black



- ▶ Item no. 2894-457
- ▶ Contents: 5 kg
- ▶ Packing unit: 1

White

▶ **Product description**

- Manufactured according to TÜV guidelines
- Suitable for run-flat tyres
- Frost-proof
- Rapid drying, so that tyre cannot slip on rim
- Outstanding exhaust air behaviour
- High slip
- Biodegradable
- No risk of allergies for fitters



02

03

Tyre Mounting Spray

Run Fluid

- ▶ Item no. 2894-460-400
- ▶ Contents:
- ▶ Packing unit: 6

▶ **Technical specifications**

- quick and easy mounting of all types of tyres (including motorcycle, low profile and wide tyres)
- fast-drying
- leaves no visible residue on tyre edges
- prevents mounting damage to the tyre flanks
- easy to dose, because sprayable
- silicone-free



03

04

Tyre chalk

- ▶ Item no. 9879-91-3
- ▶ white

- ▶ Item no. 9879-91-4
- ▶ yellow



04

05

Tyre chalk retainer

- ▶ Item no. 9879-91-5



05

06

Brush

for tyre mounting paste

- ▶ Item no. 4693-080-0



06

01

Tyre bags

100 pcs.

- ▶ Item no. 7875-906
- ▶ 700 x 260 x 1,000 mm

- ▶ Item no. 7875-909
- ▶ 700 x 500 x 1,200 mm



02

Wheel rim protector for tyre mounting machines

- ▶ Item no. 9879-990

- ▶ Product description

- suitable for quad, motorcycle and car rims
- absolutely necessary for aluminium rims
- to protect the rim edge during assembly
- robust design
- soft plastic
- Length: 15 cm
- Length of the string: 35 cm



01

Refill pack for H tyres

Tyron 5 mm up to 210 km/h

► **Item no. 9879-972**► **Product description**

- 100% self-vulcanising bands
- Bands passed all TÜV endurance and high-speed tests with overload
- Extremely tear proof and shear resistant in tyres and steel belts thanks to leading-edge technology
- Can be used for straight and 45° punctures
- Suitable for all tubeless tyres on cars and vans
- For tyres up to 210km/h!

- Content:

- 50 x 5 mm repair body
- 1 x liquid patch 50 ml



01

02

Refill pack for V tyres

Tyron 3 mm above 210 km/h

► **Item no. 9879-973**► **Product description**

- 100% self-vulcanising bands
- Bands passed all TÜV endurance and high-speed tests with overload
- Extremely tear proof and shear resistant in tyres and steel belts thanks to leading-edge technology
- Can be used for straight and 45° punctures
- Suitable for all tubeless trucks and motorbikes
- For tyres up to 270km/h!

- Content:

- 50 x 3 mm repair body
- 1 x liquid patch 50 ml



02

03

Tyre repair system

Tyrex starter kit

► **Item no. 9879-921**► **Product description**

- Mushroom-shaped repair body, suitable for radial and diagonal tyres
- Licensed for speed class V
- Only use in association with vulcanizing mass (article no. 9879-94-250)

- Set content:

- 20 x 3mm repair body
- 15 x 6mm repair body
- 1 x 3mm burr
- 1 x 6mm burr
- 5 x vulcanizing mass 15g tube




03

04

Special rubber milling cutter

For roughening the inner surface of tyres

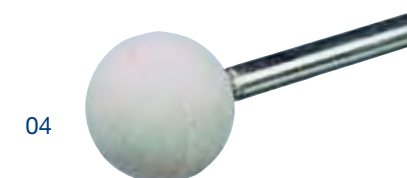► **Item no. 9879-91-1**

04

05

Tread roller

for tyre probes

► **Item no. 9879-91-2**

05



01

Sensor valve

Snap In

► Item no. 9879-100-102

► Product description

- Attachment: Clip pin
- Frequency: 434MHz
- Colour marking: Blue seal
- Sensor weight: 16 g



02

Tyre probes

Diam. 10 mm, PU: 10

► Item no. 9879-92-10

03

Tyre probes

Diam. 4.5 mm, PU: 10

► Item no. 9879-92-04



04

Miller

Diameter 6mm

► Item no. 9879-93-06

05

Tread roller

for tyre probes

► Item no. 9879-91-2

06

Special rubber milling cutter

For roughening the inner surface of tyres

► Item no. 9879-91-1





01

Awl

► Item no. 9879-978



01

02

T-handle

► Item no. 9879-975



02

03

Penetrating awls

Length: 11.5 cm

► Item no. 9879-976



03